


GV 12-2 LS

Part No.: 5212046

- Load Sense[1]

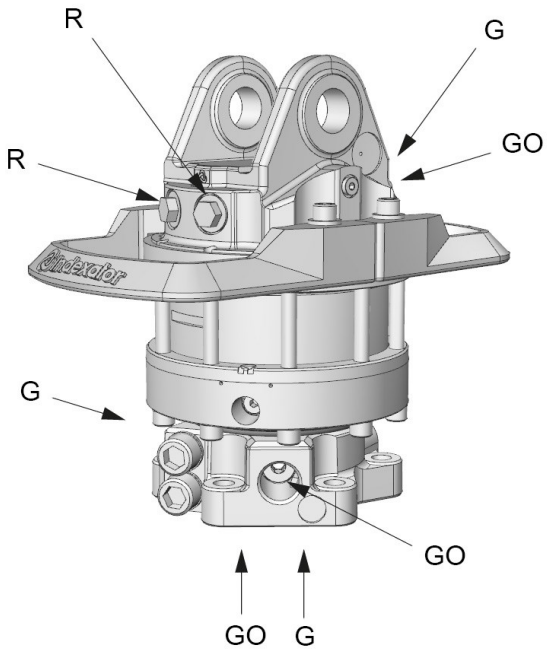

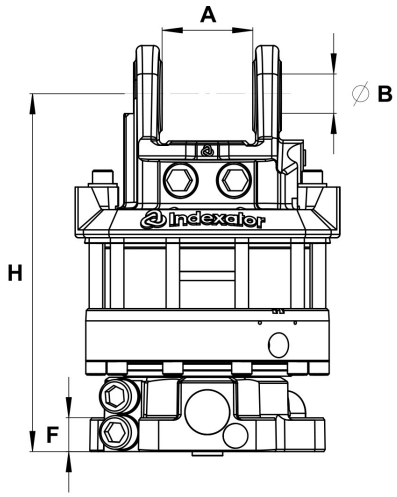

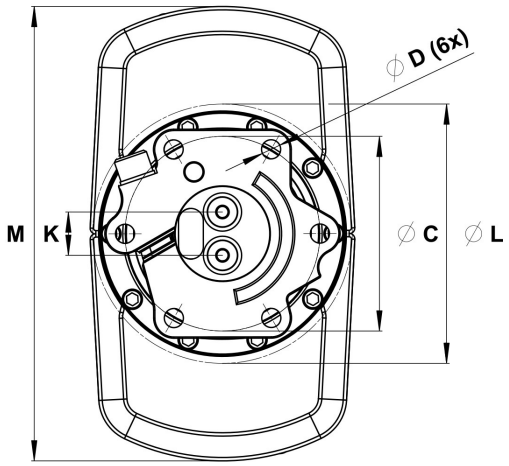

Upper connection	Lower connection
G 1/2	G 1/2

A:	B:	C:	D:	F:	H:	K:	L:	M:
80,5 mm	Ø35 mm	Ø173 mm	Ø17 mm	30 mm	317 mm	38,5 mm	Ø229 mm	404 mm

		Max	Max		Max	Max	Max	Max
57 kg	360°	100 kN	50 kN	2200 Nm	25 l/min	25 MPa	30 MPa	30 MPa

[1] A rotator with the shortening LS is not equipped with restrictors (unlike our standard rotators). This means that the oil flow from the base machine has to be adapted.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:09