

# GV 4E K

Part No.: 5040014

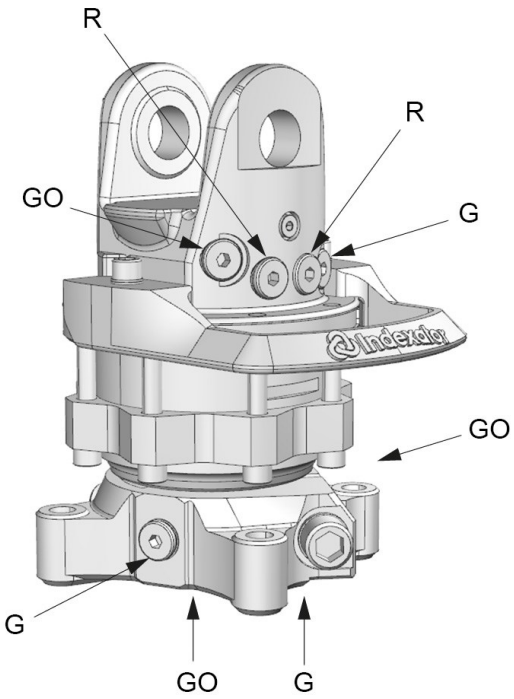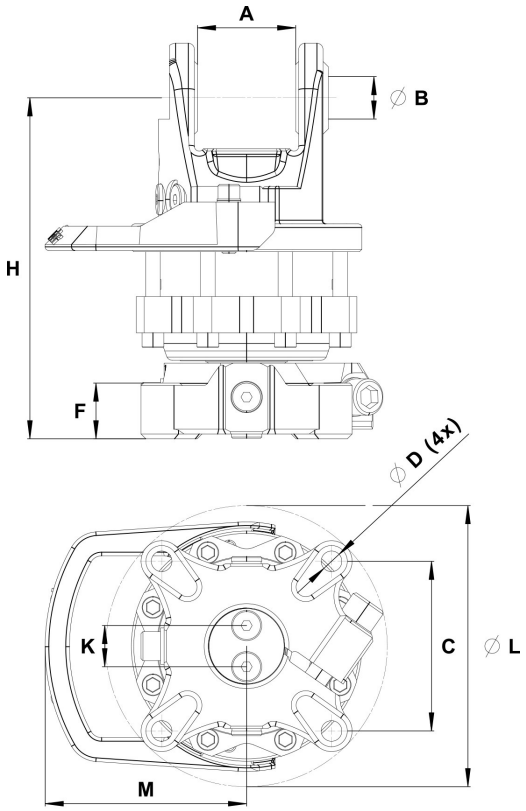


| Upper connection | Lower connection |
|---|---|
| G 3/8 | G 3/8 |

| A: | B: | C: | D: | F: | H: | K: | L: | M: |
|---|---|---|---|---|---|---|---|---|
| 80,5 mm | Ø35 mm | 140x140 | Ø17 mm | 46 mm | 281 mm | 34 mm | Ø232 mm | 166 mm |

| | | Max | Max | | Max | Max | Max | Max |
|---|---|---|---|---|---|---|---|---|
| 34.4 kg | 360° | 45 kN | 25 kN | 1150 Nm | 12 l/min | 25 MPa | 30 MPa | 30 MPa |

K = 140×140 mm lower hole pattern.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:12