


K100 G-JIC

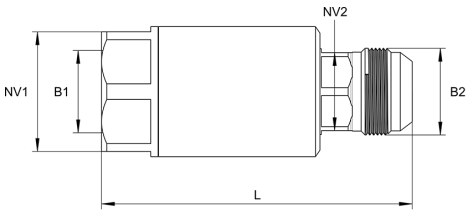





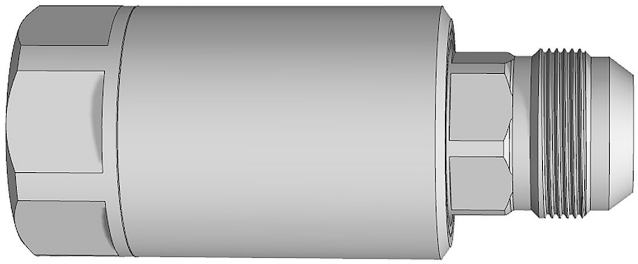


FEMALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV1	NV2	Weight	Max work pressure	Dash size	Seal kit
9010010	G 3/4	1 1/16"-12 UN	115 mm	43 mm	16 mm	36 mm	24 mm	0.73 kg	45 MPa	12	6002516
9010011	G1	1 5/16"-12 UN	120 mm	50 mm	20 mm	46 mm	30 mm	1.05 kg	45 MPa	16	6002517
9010012	G 1/2	7/8"-14 UNF	98 mm	37 mm	12 mm	32 mm	21 mm	0.5 kg	45 MPa	10	6002515
9010013	G 1 1/4	1 5/8"-12 UN	129 mm	62 mm	25 mm	55 mm	36 mm	1.59 kg	40 MPa	20	6003020
9010014	G 1/2	7/8" UNF S	98 mm	37 mm	12 mm	32 mm	21 mm	0.49 kg	45 MPa	10	6002515





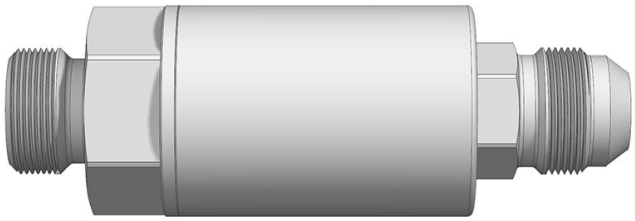

MALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV1	NV2	X	Y	Weight	Max work pressure	Dash size	Seal kit
9010073	G 1/2	7/8"-14 UNF	108 mm	37 mm	12 mm	32 mm	21 mm			0.52 kg	45 MPa	10	6002515
9010074	G 3/4	1 1/16"-12 UN	124 mm	43 mm	16 mm	36 mm	24 mm			0.76 kg	45 MPa	12	6002516
9010108	7/8"-14 UNF	G 1/2	130 mm	37 mm	12 mm	32 mm	21 mm	41 mm	9 mm	0.6 kg	45 MPa	10	6002515
9010109	1 1/16"-12 UN	G 3/4	150 mm	43 mm	16 mm	36 mm	24 mm	45 mm	10 mm	0.8 kg	45 MPa	12	6002516
9010110	1 5/16"-12 UN	G1	161 mm	50 mm	20 mm	46 mm	30 mm	45 mm	10 mm	1.03 kg	45 MPa	16	6002517

JIC cone, external, 37°
Internal, SAE O-ring
Temperature range (standard) = -30° C - +100° C

Pressures as listed should be used as guide only and not as a specification.

K = Bulkhead

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:22