

# G 121 Y BC

Part No.: 7212054

- Protected Hose Routing
- BC[1]

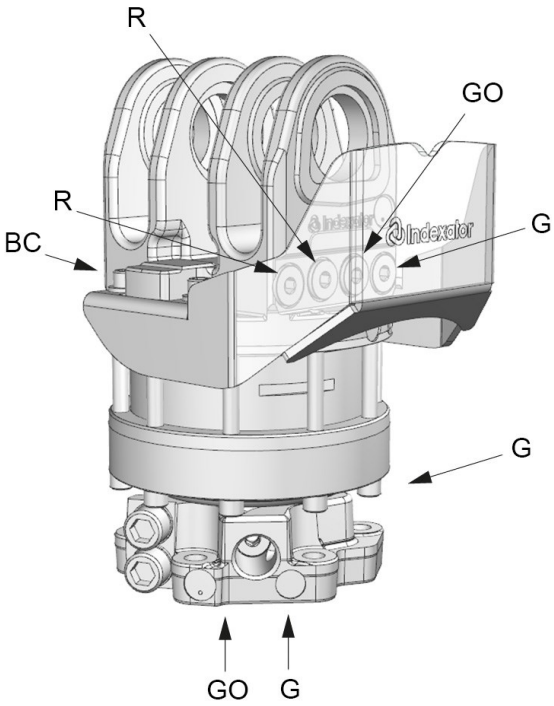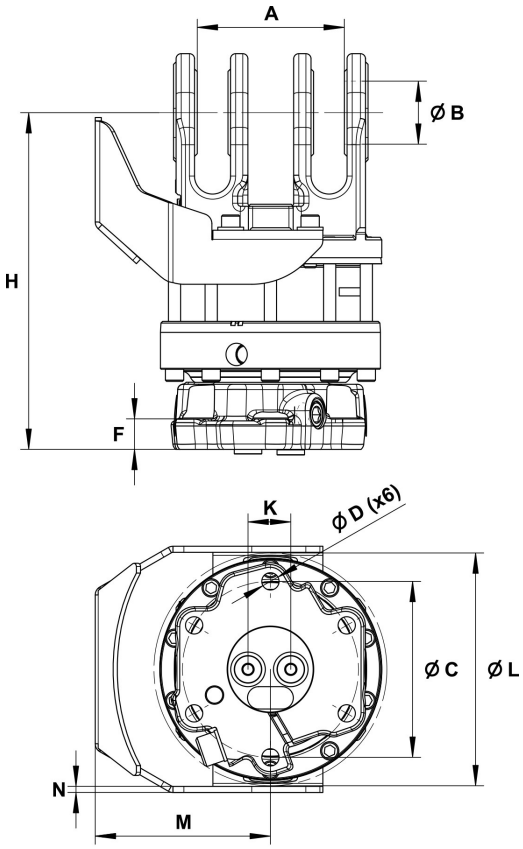


| Upper connection | Lower connection |
|---|---|
| G 1/2 | G 1/2 |

| A: | B: | C: | D: | F: | H: | K: | L: | M: | N: |
|---|---|---|---|---|---|---|---|---|---|
| MPB1 | MPB | Ø173 mm | Ø17 mm | 30 mm | 333 mm | 42 mm | Ø229 mm | 172 mm | 6 mm |

| | | Max | Max | | Max | Max | Max | Max |
|---|---|---|---|---|---|---|---|---|
| 57.2 kg | 360° | 100 kN | 50 kN | 2200 Nm | 25 l/min | 25 MPa | 30 MPa | 30 MPa |

[1] BC means that the product is purpose built for hydraulic control of the MPB1 brake.

Rotator suitable for MPB swing dampers med hydraulic brake control (BC).

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:08