

XR 500 C

Part No.: 8500001

- Central lubrication

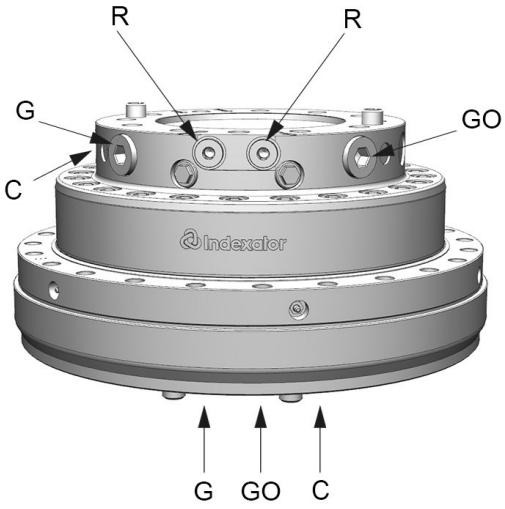

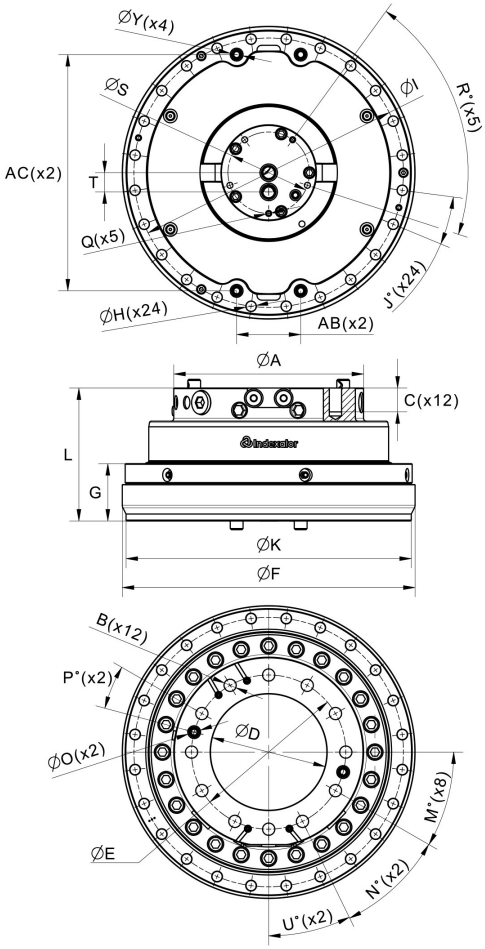

Upper		
Central lubrication: M10 x 1,0	G G0: G1	R: G 1/2

A:	AB:	AC:	B:	C:	D:	E:	F:	G:	H:	I:	J:	K:	L:
Ø326 mm	110 mm	406 mm	M24	41 mm	Ø200 mm	Ø265 mm	Ø503 mm	98,5 mm	Ø17,5 mm	Ø463 mm	15°	Ø490 mm	228,5 mm
M:	N:	O:	P:	Q:	R:	S:	T:	U:	Y:				
30°	34°	Ø22 mm	15°	M12	72°	Ø140 mm	33 mm	26°	Ø22 mm				

		Max	Max	Max	Max		Max	Max	Max	Max	Max
216 kg	360°	±700 kN[1]	±250 kN	±180 kN	±65 kNm[2]	7000 Nm	40 l/min	25 MPa	35 MPa	35 MPa	25 MPa

[1] Max axial load static indicate theoretical max load for hanging applications without accelerations.

[2] The bending moment may not be combined with axial load.

Pressure limiting valves fitted in the motor.

Oil distributor ordered separately.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:17