

# GX 30 Y LS 203

Part No.: 7320000

- Load Sense
- Protected Hose Routing

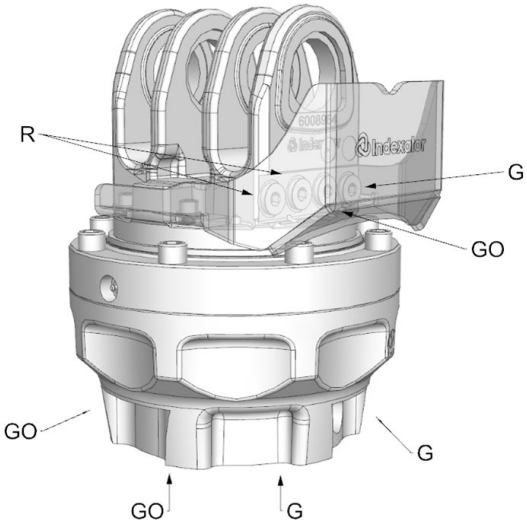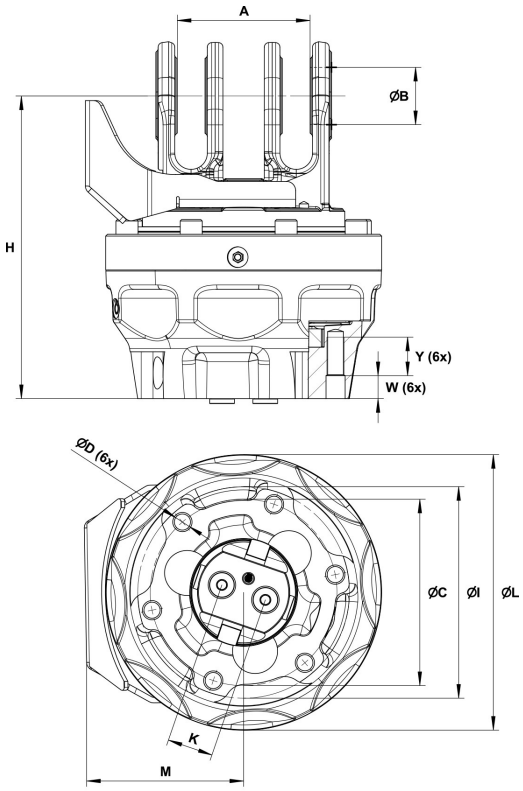


| Upper connection | Lower connection |
|---|---|
| G 1/2 | G 1/2 |

| A: | B: | C: | D: | H: | I: | K: | L: | M: | W: | Y: |
|---|---|---|---|---|---|---|---|---|---|---|
| MPB1 | MPB | Ø203 mm | M20 | 330 mm | Ø230 mm | 50 mm | Ø300 mm | 172 mm | 25 mm | 42 mm |

| | | Max | Max | | Max | Max | Max | Max |
|---|---|---|---|---|---|---|---|---|
| 80.5 kg | 360° | ±300 kN | ±90 kN | 3000 Nm | 28 l/min | 25 MPa | 30 MPa | 30 MPa |

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:13