


K100 G ED-G

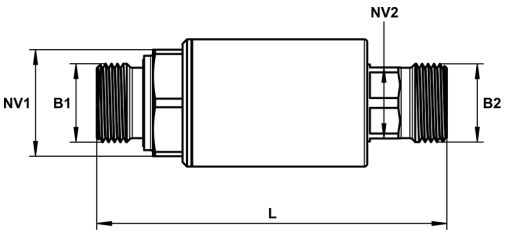



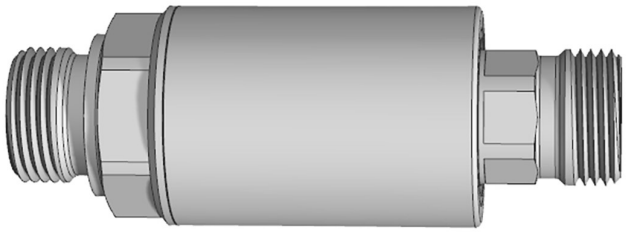

MALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV1	NV2	Weight	Max work pressure	Seal kit
9010018	G 3/4 ED	G 3/4	118 mm	43 mm	16 mm	36 mm	24 mm	0.74 kg	45 MPa	6002516
9010019	G 1/2 ED	G 1/2	104 mm	37 mm	12 mm	32 mm	21 mm	0.47 kg	45 MPa	6002515
9010043	G 1/4 ED	G 1/4	102 mm	35 mm	6 mm	32 mm	17 mm	0.5 kg	45 MPa	6003296
9010044	G 3/8 ED	G 3/8	104 mm	35 mm	8 mm	32 mm	17 mm	0.51 kg	45 MPa	6003296
9010045	G 1 ED	G1	138 mm	50 mm	20 mm	46 mm	30 mm	1.19 kg	45 MPa	6002517
9010077	G 1 1/4 ED	G 1 1/4	148 mm	62 mm	25 mm	55 mm	36 mm	1.87 kg	40 MPa	6003020

G = BSP, 60° cone
Temperature range (standard) = -30° C - +100° C
ED, soft-seated

Pressures as listed should be used as guide only and not as a specification.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:18