

AV 4E I LS

Part No.: 5040018

- Load Sense[1]

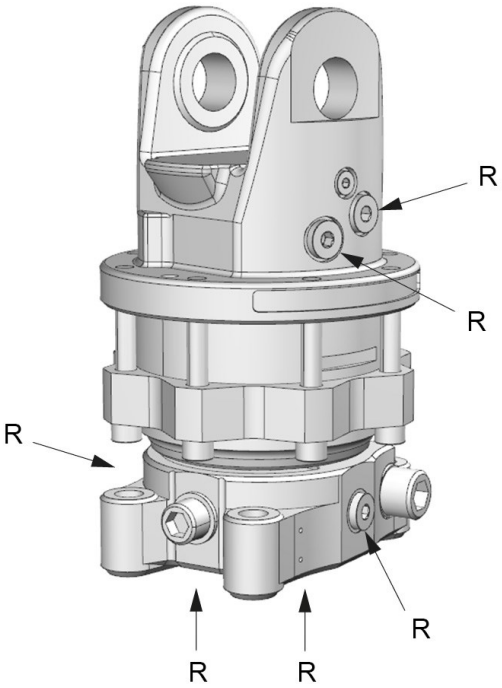

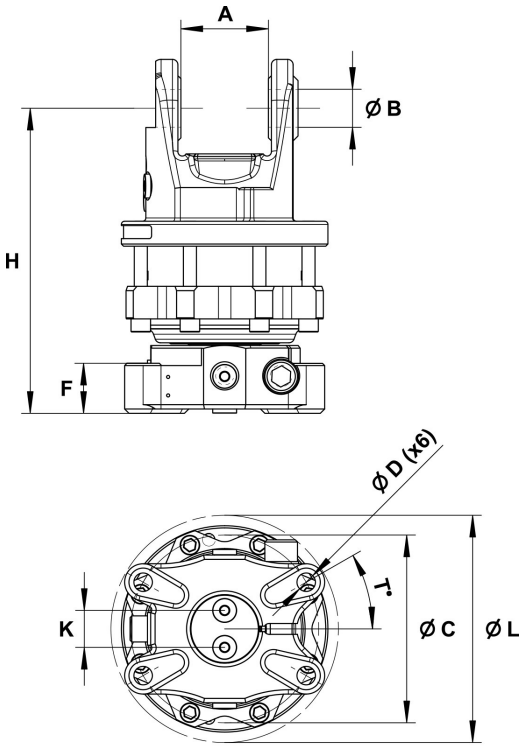

Upper connection	Lower connection
G 3/8	G 3/8

A:	B:	C:	D:	F:	H:	K:	L:	T:
80,5 mm	Ø35 mm	Ø173 mm	Ø17 mm	46 mm	281 mm	34 mm	Ø207 mm	30°

		Max	Max		Max	Max
31.7 kg	360°	45 kN	25 kN	1150 Nm	12 l/min	25 MPa

[1] A rotator with the shortening LS is not equipped with restrictors (unlike our standard rotators). This means that the oil flow from the base machine has to be adapted.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:07