


# K100 JIC

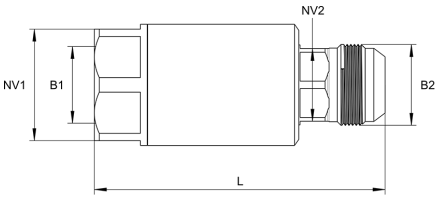






FEMALE X MALE

| Part No. | B1 | B2 | L | ØA | ØD | NV1 | NV2 | Weight | Max work pressure | Dash size | Seal kit |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 9010005 | 1 1/16”-12 UN | 1 1/16”-12 UN | 117 mm | 43 mm | 16 mm | 36 mm | 24 mm | 0.73 kg | 45 MPa | 12 | 6002516 |
| 9010006 | 1 5/16”-12 UN | 1 5/16”-12 UN | 119 mm | 50 mm | 20 mm | 46 mm | 30 mm | 1.03 kg | 45 MPa | 16 | 6002517 |
| 9010057 | 3/4”-16 UNF | 3/4”-16 UNF | 98 mm | 35 mm | 10 mm | 32 mm | 17 mm | 0.48 kg | 45 MPa | 8 | 6003296 |
| 9010058 | 7/8”-14 UNF | 7/8”-14 UNF | 101 mm | 37 mm | 12 mm | 32 mm | 21 mm | 0.5 kg | 45 MPa | 10 | 6002515 |
| 9010072 | 1 5/8”-12 UN | 1 5/8”-12 UN | 124.5 mm | 62 mm | 25 mm | 55 mm | 36 mm | 1.54 kg | 45 MPa | 20 | 6003020 |

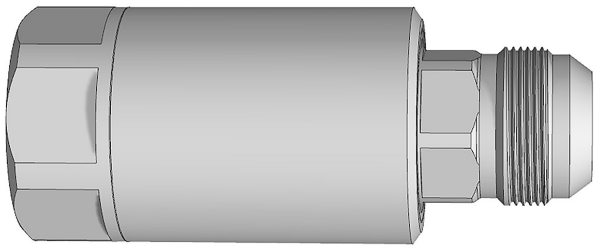

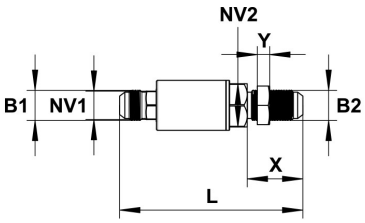


MALE X MALE

| Part No. | B1 | B2 | L | ØA | ØD | NV1 | NV2 | X | Y | Weight | Max work pressure | Dash size | Seal kit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9010038 | 3/4”-16 UNF | 3/4”-16 UNF | 109 mm | 35 mm | 10 mm | 32 mm | 17 mm | | | 0.49 kg | 45 MPa | 8 | 6003296 |
| 9010061 | 1 1/16”-12 UN | 1 1/16”-12 UN | 132 mm | 43 mm | 15.5 mm | 36 mm | 24 mm | | | 0.8 kg | 45 MPa | 12 | 6002516 |
| 9010062 | 1 5/16”-12 UN | 1 5/16”-12 UN | 142 mm | 50 mm | 20 mm | 46 mm | 30 mm | | | 1.19 kg | 45 MPa | 16 | 6002517 |
| 9010066 | 7/8”-14 UNF | 7/8”-14 UNF | 135 mm | 37 mm | 12 mm | 32 mm | 21 mm | 41 mm | 9 mm | 0.57 kg | 45 MPa | 10 | 6002515 |
| 9010067 | 1 1/16”-12 UN | 1 1/16”-12 UN | 157 mm | 43 mm | 16 mm | 36 mm | 24 mm | 45 mm | 11 mm | 0.88 kg | 45 MPa | 12 | 6002516 |
| 9010068 | 1 5/16”-12 UN | 1 5/16”-12 UN | 164 mm | 50 mm | 20 mm | 46 mm | 30 mm | 45 mm | 11 mm | 1.27 kg | 45 MPa | 16 | 6002517 |
| 9010069 | 1 5/8”-12 UN | 1 5/8”-12 UN | 171 mm | 62 mm | 25 mm | 55 mm | 36 mm | 46 mm | 11 mm | 1.96 kg | 45 MPa | 20 | 6003020 |

JIC cone, external, 37°
Internal, SAE O-ring
Temperature range (standard) = -30° C - +100° C

Pressures as listed should be used as guide only and not as a specification.

K = Bulkhead

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:23