

GV 3 I

Part No.: 5002326

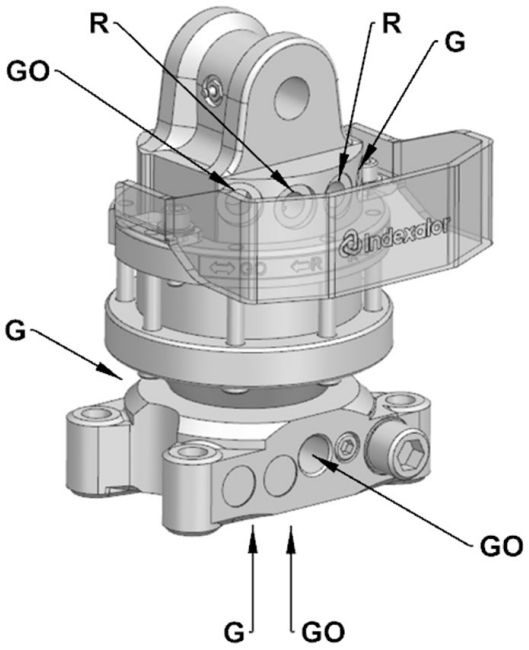

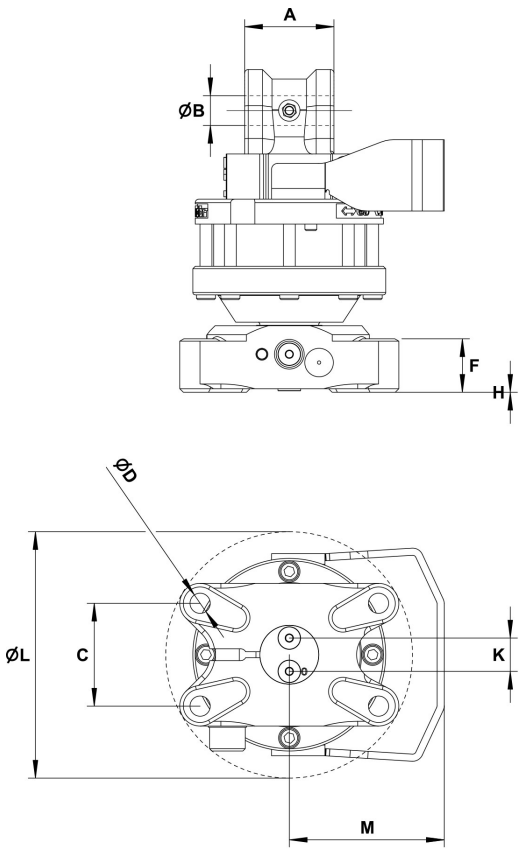

Upper connection	Lower connection
G 3/8	G 1/4

A:	B:	C	D:	F:	H:	K:	L:	M:	T:
75 mm	Ø25 mm	Ø173 mm	Ø17 mm	46 mm	237 mm	28 mm	Ø210 mm	130 mm	30°

		Max	Max		Max	Max	Max	Max
22.8 kg	360°	30 kN[1]	12.5 kN	950 Nm	10 l/min	25 MPa	20 MPa[2]	30 MPa

[1] 40 kN when mounted to a piece goods crane.

[2] 25 MPa when mounted to a piece goods crane.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:11