

XR 600 C

Part No.: 8600001

- Central lubrication

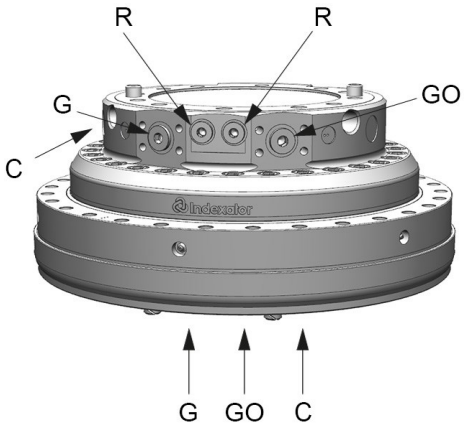

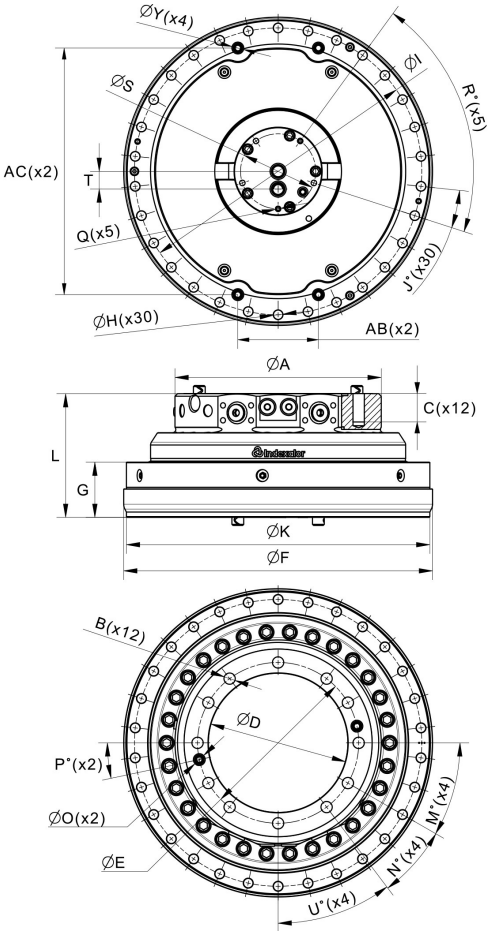

Upper		
Central lubrication: M10 x 1,0	G G0: SAE 6000 DN 25	R: G 1/2

A:	AB:	AC:	B:	C:	D:	E:	F:	G:	H:	I:	J:	K:	L:
Ø384 mm	150 mm	460 mm	M24	53 mm	Ø260 mm	Ø300 mm	Ø575 mm	103 mm	Ø17,5 mm	Ø535 mm	12°	Ø565 mm	231 mm
M:	N:	O:	P:	Q:	R:	S:	T:	U:	Y:				
30°	23°	Ø22 mm	12°	M12	72°	Ø140 mm	33 mm	37°	Ø22 mm				

		Max	Max	Max	Max		Max	Max	Max	Max	Max
264 kg	360°	±850 kN[1]	±300 kN	±200 kN	±115 kNm[2]	7000 Nm	40 l/min	25 MPa	35 MPa	35 MPa	25 MPa

[1] Max axial load static indicate theoretical max load for hanging applications without accelerations.

[2] The bending moment may not be combined with axial load.

Pressure limiting valves fitted in the motor.

Can be supplemented with hose guard.

Oil distributor ordered separately.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:17