


XR 400 E HT P X2 C


Part No.: 8400033

- Central lubrication
- Slip ring

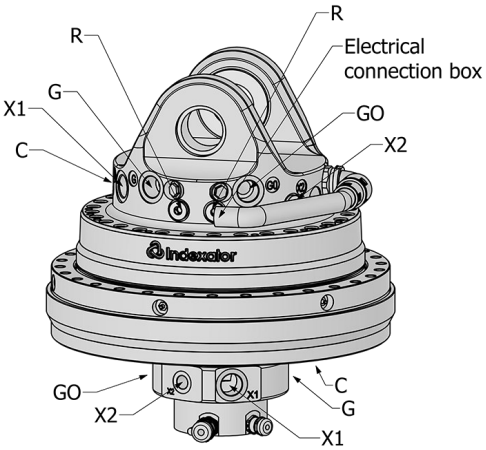

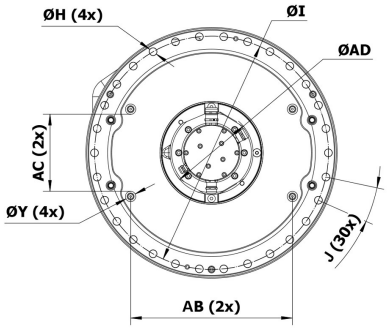

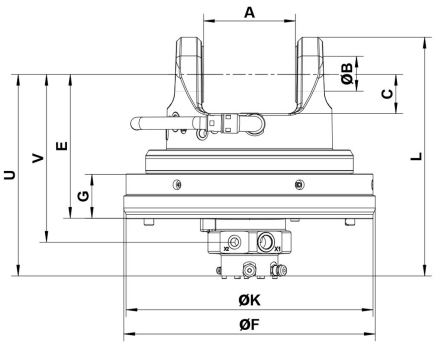



Upper					Lower				
X1: G1	X2: G 1/2	Central lubrication: G 1/4	G G0: G1	R: G 1/2	X1: G1	X2: G 1/2	Central lubrication: G 1/4	G: G1	G0: G1

A: 151,3 mm	AB: 174 mm	AC: 390 mm	AD: Ø190 mm	B: Ø60 mm	C: 65 mm	E: 313,3 mm	F: Ø488 mm	G: 99 mm	H: Ø14 mm	I: Ø450 mm	J: 12°	K: Ø474 mm	L: 388,3 mm
U: 452 mm	V: 368 mm	W: Ø225 mm	Y: Ø22 mm										

		Max	Max	Max	Max		Max	Max	Max	Max	Max	Max	Max
239 kg	360°	±550 kN[1]	±200 kN	±140 kN	±47 kNm[2]	7000 Nm	300 V	90 A	40 l/min	25 MPa	40 MPa	40 MPa	25 MPa
Max	Max												
X1	X2												
40 MPa	40 MPa												

[1] Max axial load static indicate theoretical max load for hanging applications without accelerations.

[2] The bending moment may not be combined with axial load.

Pressure limiting valves fitted in the motor.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:16