


GV 3 -49,5/25 P

Part No.: 5002300

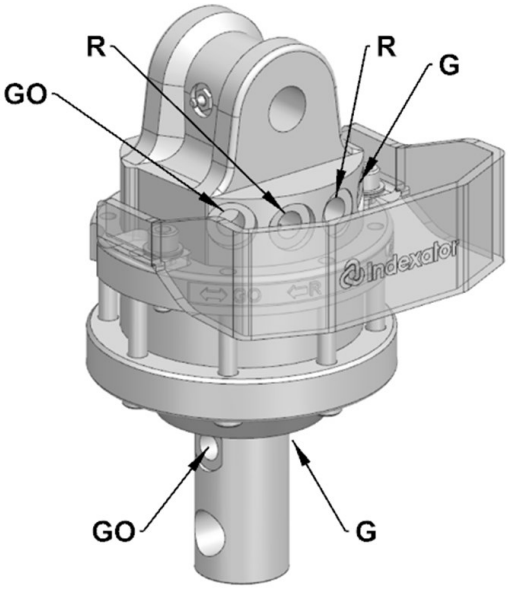

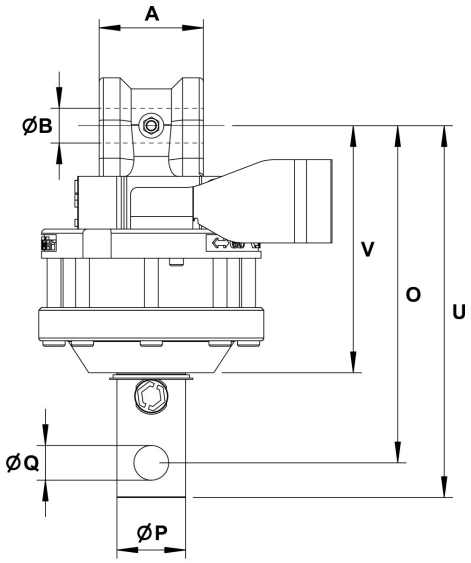

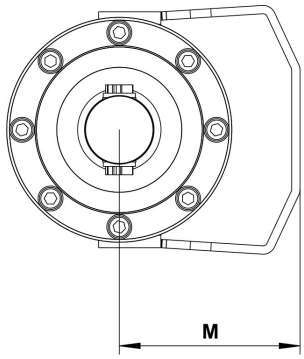

Upper connection	Lower connection
G 3/8	G 3/8

A:	B:	M:	O:	P:	Q:	U:	V:
75 mm	Ø25 mm	130 mm	243 mm	Ø49,5 mm	Ø25 mm	268 mm	178 mm

		Max	Max		Max	Max	Max	Max
17.4 kg	360°	30 kN[1]	12.5 kN	950 Nm	10 l/min	25 MPa	20 MPa[2]	30 MPa

[1] 40 kN when mounted to a piece goods crane.

[2] 25 MPa when mounted to a piece goods crane.

Rotator where the connections and tap hole through the shaft are parallel.

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:11