


IDL G-JIC

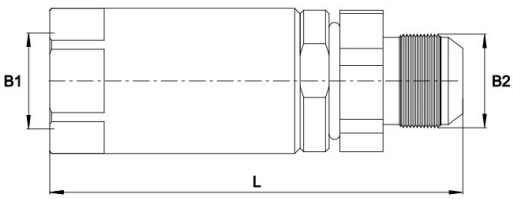





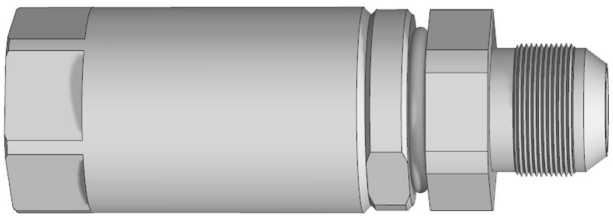


FEMALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV	Weight	Max work pressure	Dash size	Seal kit
5001668	G 3/4	1 1/16”-12 UN	112 mm	40 mm	16 mm	36 mm	0.64 kg	35 MPa	12	5001633
5001669	G1	1 5/16”-12 UN	117 mm	50 mm	20 mm	46 mm	1.11 kg	35 MPa	16	5001634
5001670	G 1/2	7/8”-14 UNF	98 mm	35 mm	12 mm	32 mm	0.48 kg	35 MPa	10	5001632
5001672	G 1 1/4	1 5/8”-12 UN	122 mm	55 mm	25 mm	50 mm	1.26 kg	32 MPa	20	5001635
5001695	G 1/2	7/8” UNF S	100 mm	35 mm	12 mm	32 mm	0.48 kg	35 MPa	10	5001632
5001696	G 3/4	1 1/16”-12 UN S	114 mm	40 mm	16 mm	36 mm	0.64 kg	35 MPa	12	5001633
5001697	G1	1 5/16”-12 UN S	118 mm	50 mm	20 mm	46 mm	1.09 kg	35 MPa	16	5001634

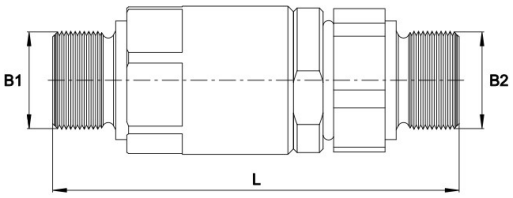



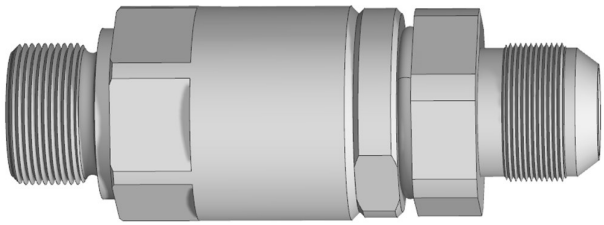

MALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV	Weight	Max work pressure	Dash size	Seal kit
5001628	G 3/4	1 1/16”-12 UN	108 mm	40 mm	16 mm	36 mm	0.55 kg	35 MPa	12	5001633

JIC cone, external, 37°
Internal, SAE O-ring
Temperature range (standard) = -30° C - +100° C

Pressures as listed should be used as guide only and not as a specification.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:22