


XR 600 E P X2 C


Part No.: 8600017

- Central lubrication
- Slip ring

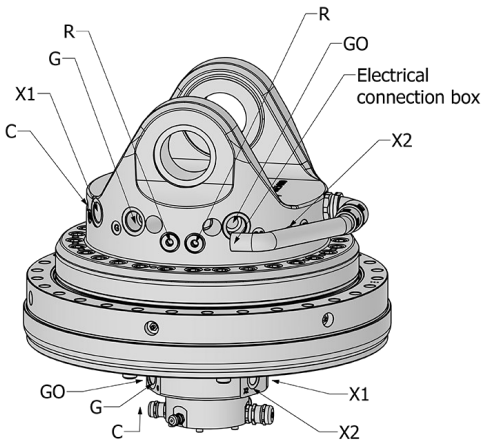

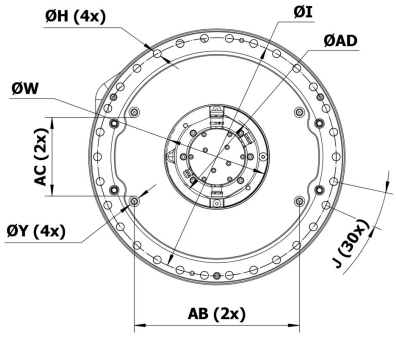

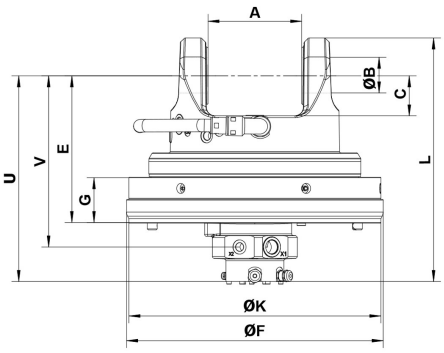



Upper					Lower				
X1: G1	X2: G 1/2	Central lubrication: G 1/4	G G0: G1	R: G 1/2	X1: G1	X2: G 1/2	Central lubrication: G 1/4	G: G1	G0: G1

A: 210 mm	AB: 150 mm	AC: 460 mm	AD: Ø190 mm	B: Ø80 mm	C: 90 mm	E: 331 mm	F: Ø575 mm	G: 103 mm	H: Ø17,5 mm	I: Ø535 mm	J: 12°	K: Ø565 mm	L: 416 mm
U: 467 mm	V: 384 mm	W: Ø225 mm	Y: Ø22 mm										

		Max	Max	Max	Max		Max	Max	Max	Max	Max	Max	Max
309 kg	360°	±850 kN[1]	±300 kN	±200 kN	±115 kNm[2]	7000 Nm	300 V	90 A	40 l/min	25 MPa	40 MPa	40 MPa	25 MPa
Max	Max												
40 MPa	40 MPa												

[1] Max axial load static indicate theoretical max load for hanging applications without accelerations.

[2] The bending moment may not be combined with axial load.

Pressure limiting valves fitted in the motor.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:17