


GV 14S A Y HD

Part No.: 5140001

- Protected Hose Routing

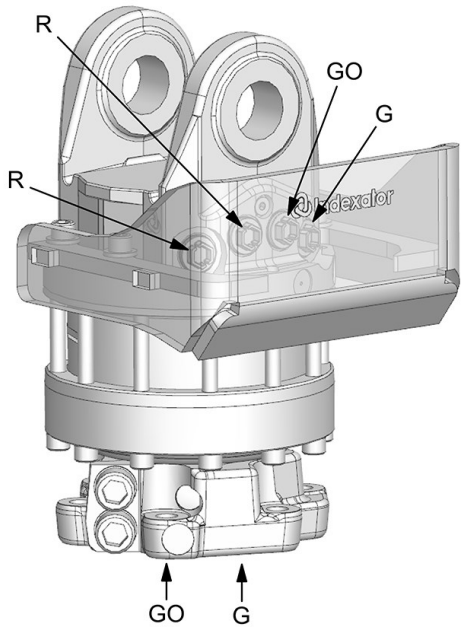

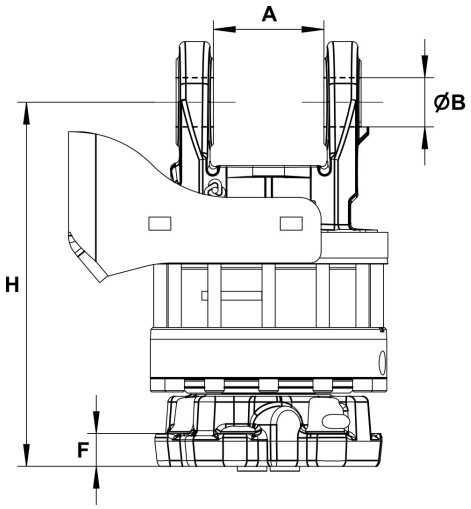

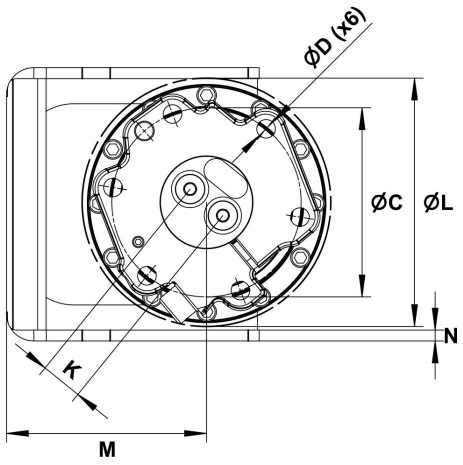

Upper connection	Lower connection
G 1/2	G 1/2

A:	B:	C:	D:	F:	H:	K:	L:	M:	N:
101 mm	Ø45 mm	Ø173 mm	Ø17 mm	30 mm	333 mm	38,5 mm	Ø227 mm	183 mm	10 mm

		Max	Max		Max	Max	Max	Max
65 kg	360°	100 kN	50 kN	3300 Nm	35 l/min	25 MPa	30 MPa	30 MPa

Rotator with only axial connections for a grapple function.

Rotators with the term HD has a hose guard with extra thick material (10 mm), compared to rotators designated with Y or Y XL (6 mm).

Adapter sets are available for alternative connections.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:10