


# HX 35 D LS

Part No.: 7350002

- Load Sense

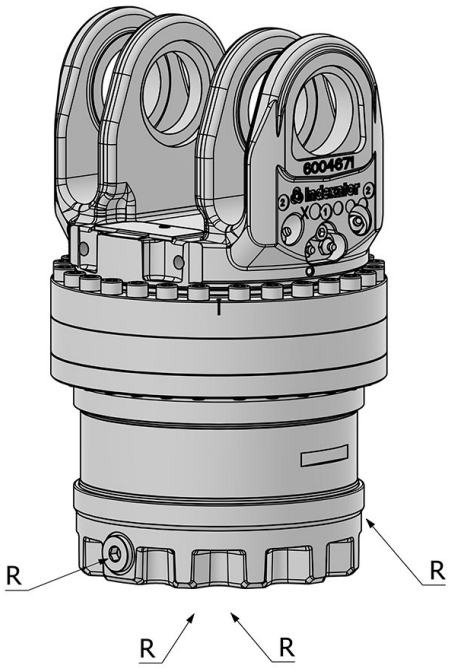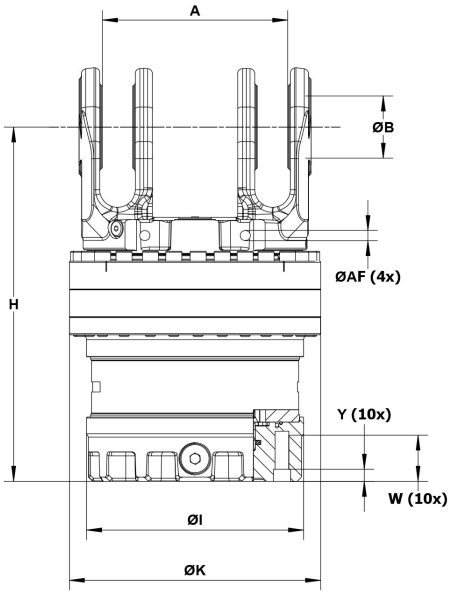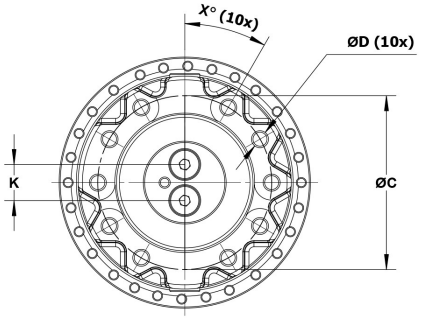


| Lower connection |
| --- |
| G 1/2 |

| A: | AF: | B: | C: | D: | H: | I: | K: | L: | W: | X: | Y: |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| MPB2 | M12 | MPB | Ø173 mm | M16 | 353 mm | Ø216 mm | 36 mm | Ø250 mm | 12 mm | 30° | 34 mm |

| | | Max | Max | | Max | Max |
| --- | --- | --- | --- | --- | --- | --- |
| 75 kg | 360° | ±160 kN | ±50 kN | 3300 Nm | 35 l/min | 25 MPa |

A rotator with the shortening LS is not equipped with restrictors (unlike our standard rotators). This means that the oil flow from the base machine has to be adapted.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:14