


K100 ORFS

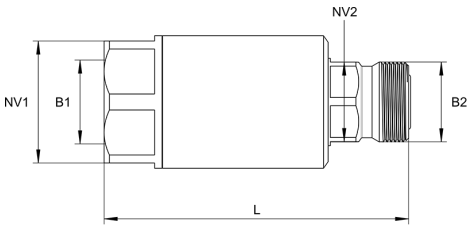





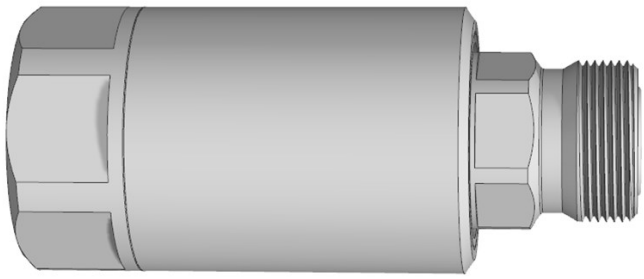


FEMALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV1	NV2	Weight	Max work pressure	Dash size	Seal kit
9010007	1 3/16”-12 UN	1 3/16”-12 UN	114 mm	50 mm	15.5 mm	46 mm	30 mm	1.14 kg	45 MPa	12	6002517
9010008	1 7/16”-12 UN	1 7/16”-12 UN	119 mm	62 mm	20.5 mm	55 mm	36 mm	1.68 kg	40 MPa	16	6003020
9010064	13/16”-16 UNF	13/16”-16 UNF	98 mm	37 mm	9.5 mm	32 mm	21 mm	0.52 kg	45 MPa	8	6002515

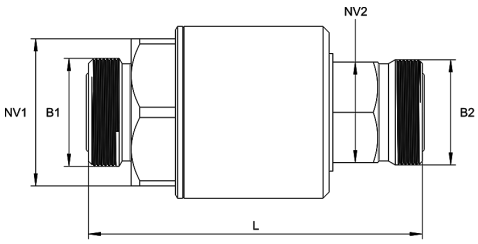



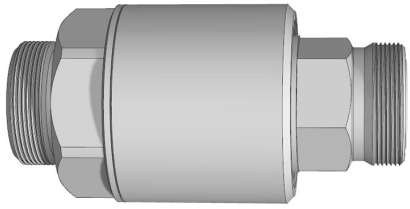

MALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV1	NV2	X	Y	Weight	Max work pressure	Dash size	Seal kit
9010009	1 11/16”-12 UN	1 11/16”-12 UN	136 mm	70 mm	26 mm	60 mm	41 mm			2.21 kg	40 MPa	20	6003021
9010059	1 3/16”-12 UN	1 3/16”-12 UN	132 mm	50 mm	15.5 mm	46 mm	30 mm			1.27 kg	45 MPa	12	6002517
9010060	1 7/16”-12 UN	1 7/16”-12 UN	136 mm	62 mm	20.5 mm	55 mm	36 mm			1.85 kg	40 MPa	16	6003020
9010063	13/16”-16 UNF	13/16”-16 UNF	107 mm	37 mm	9.5 mm	32 mm	21 mm			0.55 kg	45 MPa	8	6002515
9010065	1-14 UNS	1-14 UNS	120 mm	43 mm	12.5 mm	36 mm	24 mm			0.83 kg	45 MPa	10	6002516
9010119	1 3/16”-12 UN	1 3/16”-12 UN	155 mm	50 mm	15.5 mm	30 mm	46 mm	40 mm	10 mm	1.26 kg	45 MPa		6002517

Temperature range (standard) = -30° C - +100° C

Pressures as listed should be used as guide only and not as a specification.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:18