


# IDL G ED-JIC

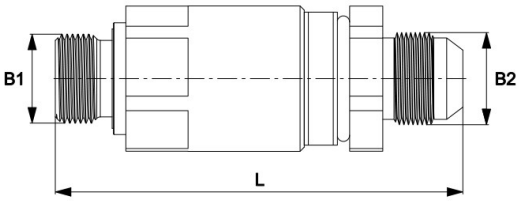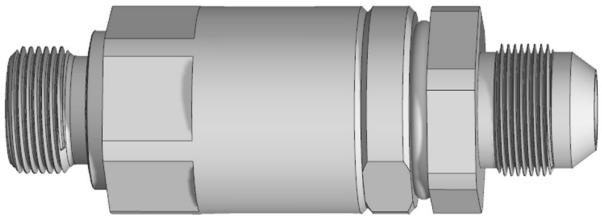

MALE X MALE

| Part No. | B1 | B2 | L | ØA | ØD | NV | Weight | Max work pressure | Dash size | Seal kit |
|---|---|---|---|---|---|---|---|---|---|---|
| 5001748 | G 1/2 | 7/8”-14 UNF | 98 mm | 35 mm | 12 mm | 32 mm | 0.42 kg | 35 MPa | 10 | 5001637 |

G = BSP, 60° cone
JIC cone, external, 37°
Internal, SAE O-ring
Temperature range (standard) = -30° C - +100° C
ED, soft-seated

Pressures as listed should be used as guide only and not as a specification.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:22