


K100 JIC

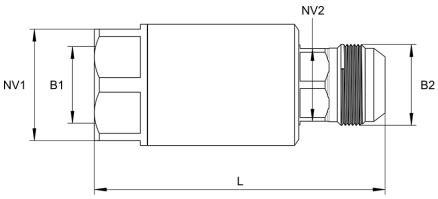





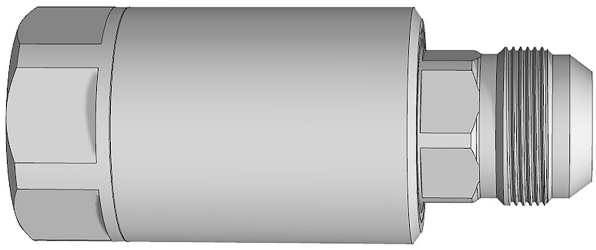

FEMALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV1	NV2	Weight	Max work pressure	Dash size	Seal kit
9010005	1 1/16”-12 UN	1 1/16”-12 UN	117 mm	43 mm	16 mm	36 mm	24 mm	0.73 kg	45 MPa	12	6002516
9010006	1 5/16”-12 UN	1 5/16”-12 UN	119 mm	50 mm	20 mm	46 mm	30 mm	1.03 kg	45 MPa	16	6002517
9010057	3/4”-16 UNF	3/4”-16 UNF	98 mm	35 mm	10 mm	32 mm	17 mm	0.48 kg	45 MPa	8	6003296
9010058	7/8”-14 UNF	7/8”-14 UNF	101 mm	37 mm	12 mm	32 mm	21 mm	0.5 kg	45 MPa	10	6002515
9010072	1 5/8”-12 UN	1 5/8”-12 UN	124.5 mm	62 mm	25 mm	55 mm	36 mm	1.54 kg	45 MPa	20	6003020

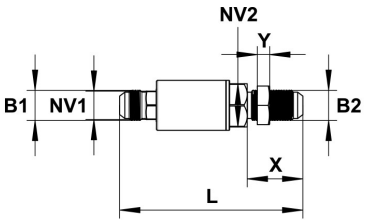





MALE X MALE

Part No.	B1	B2	L	ØA	ØD	NV1	NV2	X	Y	Weight	Max work pressure	Dash size	Seal kit
9010038	3/4”-16 UNF	3/4”-16 UNF	109 mm	35 mm	10 mm	32 mm	17 mm			0.49 kg	45 MPa	8	6003296
9010061	1 1/16”-12 UN	1 1/16”-12 UN	132 mm	43 mm	15.5 mm	36 mm	24 mm			0.8 kg	45 MPa	12	6002516
9010062	1 5/16”-12 UN	1 5/16”-12 UN	142 mm	50 mm	20 mm	46 mm	30 mm			1.19 kg	45 MPa	16	6002517
9010066	7/8”-14 UNF	7/8”-14 UNF	135 mm	37 mm	12 mm	32 mm	21 mm	41 mm	9 mm	0.57 kg	45 MPa	10	6002515
9010067	1 1/16”-12 UN	1 1/16”-12 UN	157 mm	43 mm	16 mm	36 mm	24 mm	45 mm	11 mm	0.88 kg	45 MPa	12	6002516
9010068	1 5/16”-12 UN	1 5/16”-12 UN	164 mm	50 mm	20 mm	46 mm	30 mm	45 mm	11 mm	1.27 kg	45 MPa	16	6002517
9010069	1 5/8”-12 UN	1 5/8”-12 UN	171 mm	62 mm	25 mm	55 mm	36 mm	46 mm	11 mm	1.96 kg	45 MPa	20	6003020

JIC cone, external, 37°
Internal, SAE O-ring
Temperature range (standard) = -30° C - +100° C

Pressures as listed should be used as guide only and not as a specification.

K = Bulkhead

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:23