

XR 600

Part No.: 8600000

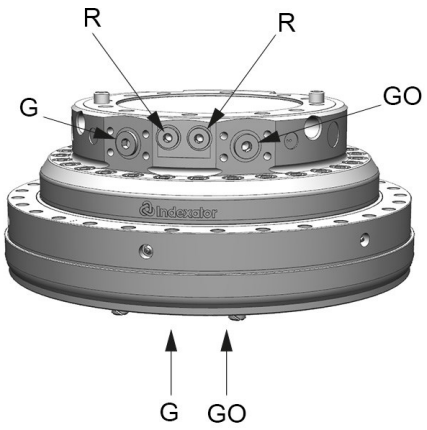

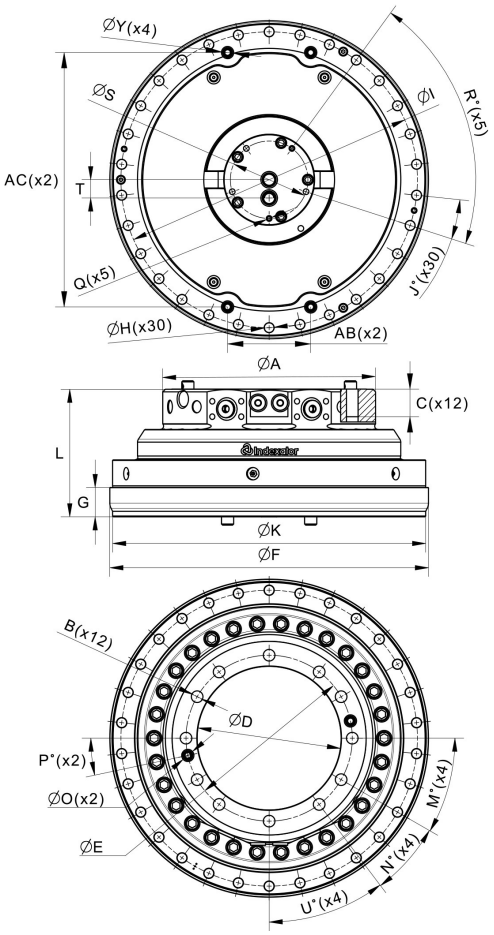

Upper	
G G0: SAE 6000 DN 25	R: G 1/2

A: Ø384 mm	AB: 150 mm	AC: 460 mm	B: M24	C: 53 mm	D: Ø260 mm	E: Ø300 mm	F: Ø575 mm	G: 103 mm	H: Ø17,5 mm	I: Ø535 mm	J: 12°	K: Ø565 mm	L: 231 mm
M: 30°	N: 23°	O: Ø22 mm	P: 12°	Q: M12	R: 72°	S: Ø140 mm	T: 33 mm	U: 37°	Y: Ø22 mm				

		Max	Max	Max	Max		Max	Max	Max	Max
264 kg	360°	±850 kN[1]	±300 kN	±200 kN	±115 kNm[2]	7000 Nm	40 l/min	25 MPa	35 MPa	35 MPa

[1] Max axial load static indicate theoretical max load for hanging applications without accelerations.

[2] The bending moment may not be combined with axial load.

Pressure limiting valves fitted in the motor.

Can be supplemented with hose guard.

Oil distributor ordered separately.

We reserve the right to make product changes. For further technical information relating to integration and hydraulic connections, please contact rotator@indexator.com

Indexator Rotator Systems AB, Box 11, SE-922 21 Vindeln, Sweden
E-mail: rotator@indexator.com Tel: +46 933 148 00
PDF document generated: 2026-07-28 16:17